



10kW¹ Standby Generator

Briggs & Stratton® The Smart Choice

Durable back-up power for businesses and luxury homes. Guard against losses due to power outages with a Briggs & Stratton Standby Generator.



Parts • Labor • Travel
Limited
Warranty⁴



Designed for Easy Installation & Maintenance

- Easy to move into installation location with two-wheel dolly
- Approved for installation as close as 18" to a building²
- Removable roof and side panels provide better service access to the engine and alternator

Compact Size

- The smallest generator footprint in its class
- Perfect for small properties

Symphony® II Power Management System

- Customizable to your home's needs
- Automatically balances the power of your home's electrical load including high wattage items like air conditioning units and electric ovens
- Offers whole house power with a more affordable home generator

Commercial-Grade Vanguard® Engine

- Powerful V-Twin OHV engine
- Easy conversion between natural gas (NG) and liquid propane vapor (LPV) during installation

Quality Clean Power

- Ensures your electronics are safely powered

Corrosion Resistant Enclosure & Base

- Made with automotive grade galvanized steel to resist rust
- Powder-coated paint for years of protection against chips and abrasions

Briggs & Stratton® Full Synthetic Generator Oil

- Shields the engine from low temperature sludge buildup and high temperature deposits
- Reduces engine wear, scuffing and abrasion
- Enhanced cold weather start-up protection to -20°F

Generator Set Rating

Model	Enclosure Type	Voltage	Phase ³	Hz	Circuit Breaker Amps	Liquid Propane Vapor		Natural Gas		Limited Warranty ⁴
						LPV kW ¹	LPV Amps	NG kW ¹	NG Amps	Parts, Labor, Travel
040375	Galvanneal	120/240	1	60	50	10	41.7	9	37.5	5 Year

¹ This generator is certified in accordance with UL (Underwriters Laboratories) 2200 (stationary engine generator assemblies) and CSA (Canadian Standards Association) standard C22.2 No. 100-14 (motors and generators).

² The installation manual contains specific instructions related to generator placement in addition to NFPA 37, including the requirement that carbon monoxide detectors be installed and maintained in your home.

³ Single phase units are rated at 1.0 power factor and three phase units are rated at 0.8 power factor.

⁴ See operator's manual or briggsandstratton.com for complete warranty details.

Engine Specifications

Engine		Lubrication	
Engine Brand	Vanguard®	Oil Capacity (oz)	48
Engine Speed (RPM)	3600	Lubrication System	Full Pressure
Engine Fuel	Liquid Propane Vapor (LPV) or Natural Gas (NG)	Recommended Oil	5W30 Full Synthetic
Engine Cylinder Configuration	OHV	Alternator Specs	
Number of Cylinders	2	Manufacturer	Briggs & Stratton
Displacement (cc)	570	Type	Self-Excited, Rotation Field
Compression Ratio	8.3:1	Voltage Regulator	Brushed/Electronic
Governor Type	Mechanical	Insulation	Class F
Frequency Regulation	+/- 2.5 Hz	Controller Features	
Valves	OHV with Hardened Seats	Hour Meter	Yes
Ignition System	Fixed Timing	LED Digital Display	Yes
Starter Motor Rating Voltage	12 Volt	Fault Code Display	Yes
Battery Required	12 Volt, Group BCI 26 or 51, 540 CCA Minimum	Weekly Exerciser	Yes
		Low Oil Pressure Shutdown	Yes
		High Temperature Shutdown	Yes

Operations

Fuel Consumption ²				Sound Rating At 7 Meters
	Full Load	1/2 Load	No Load	67 dBA ⁴
BTU/hr	NG - 211,000 LPV - 164,000	NG - 125,000 LPV - 107,000	NG - 60,000 LPV - 59,000	
ft³/hr	NG - 211 LPV - 65.6	NG - 125 LPV - 42.8	NG - 60 LPV - 23.6	
m³/hr	NG - 5.97 LPV - 1.86	NG - 3.54 LPV - 1.21	NG - 1.70 LPV - 0.67	



Parts • Labor • Travel
Limited
Warranty³

Unlike other standby generator manufacturers, our warranty covers **parts, labor AND travel for the full length of the warranty** with no start-up costs!

¹ This generator is certified in accordance with UL (Underwriters Laboratories) 2200 (stationary engine generator assemblies) and CSA (Canadian Standards Association) standard C22.2 No. 100-14 (motors and generators).

² Fuel consumption rates are estimated based on normal operating conditions at ½ load. Generator operation may be greatly affected by elevation and the cycling operation of multiple electrical appliances – fuel flow rates may vary depending on these factors.

³ See operator's manual or BRIGGSandSTRATTON.com for complete warranty details.

⁴ Lowest no-load measurement per ISO 3744. Sound level measurement at other locations around generator may be different depending upon installation configuration.

Additional Information

Other Features

Enclosure Material	Galvanneal Steel with Corrosion Resistant Paint
Overcrank Protection	Yes
Engine Warm Up (sec)	20 or 50 Automatic Transfer Switch Controlled
Engine Cool Down (min)	1
Response Time (sec)	26 or 56 Automatic Transfer Switch Controlled
Monitoring Options	Basic Wireless Monitor InfoHub™ Monitor
Continuous Battery Charging	Yes

Weight and Dimensions


Assembled Weight (lbs / kg)	272 / 123
Overall Dimensions (in / mm)	28 x 26.1 x 34.8 / 711 x 663 x 884
Packaged Weight (lbs / kg)	330 / 150
Packaged Dimensions (in / mm)	39 x 35.5 x 42 / 991 x 902 x 1067

Certification

CARB Compliant	Yes*
cUL Listed to CSA 22.2 No. 100-14	Yes
UL 2200 Listed	Yes
EPA Certified Fuel System	Yes

Available Accessories

Maintenance Kit	6035
Cold Weather Kit	6030A
Basic Wireless Monitor	6264
InfoHub	6517
Remote Status Monitor	6144

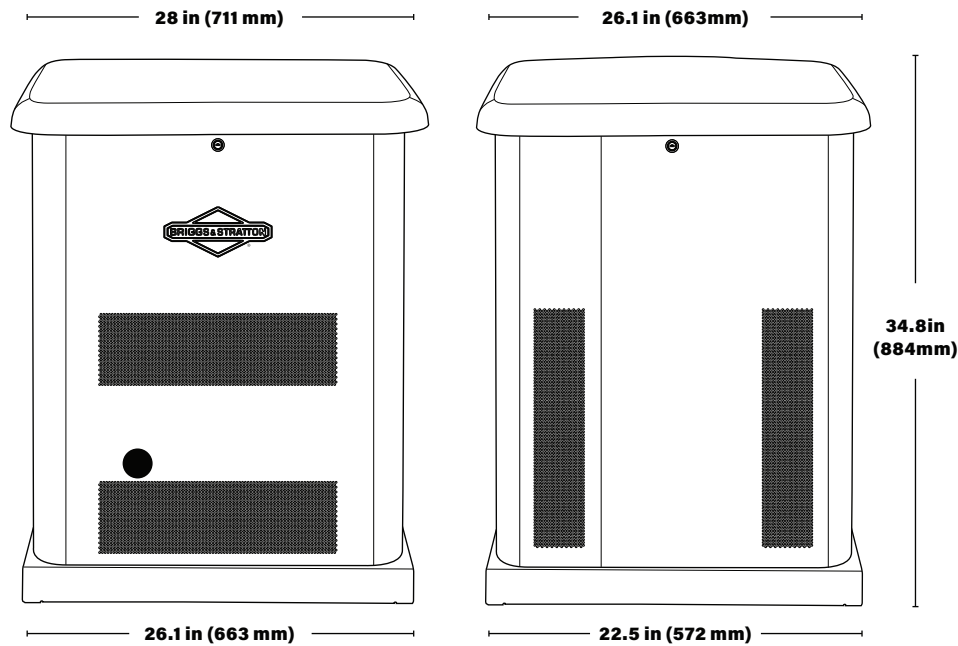

* CARB does not regulate emergency standby generators outputting less than 50 HP. Only the EPA standards apply.

¹ This generator is certified in accordance with UL (Underwriters Laboratories) 2200 (stationary engine generator assemblies) and CSA (Canadian Standards Association) standard C22.2 No. 100-14 (motors and generators).


Fuel Pipe Size Recommendation Chart (Capacity in Thousands of BTU/Hour)

Natural Gas / Inlet Pressure less than 2 PSI / Pressure Drop 1/2" Water Column / Specific Gravity 0.60

	1/2" pipe capacity	3/4" pipe capacity	1" pipe capacity	1-1/4" pipe capacity	1-1/2" pipe capacity	2" pipe capacity
20' Length²	118	247	466	957	1,430	2,760
40' Length²	81	170	320	657	985	1,900
60' Length²	65	137	257	528	791	1,520
80' Length²	56	117	220	452	677	1,300
100' Length²	50	104	195	400	600	1,160

Liquid Propane Vapor / Inlet Pressure 11" Water Column / Pressure Drop 1/2" Water Column / Specific Gravity 1.50

	1/2" pipe capacity	3/4" pipe capacity	1" pipe capacity	1-1/4" pipe capacity	1-1/2" pipe capacity	2" pipe capacity
20' Length²	200	418	788	1,617	2,423	4,666
40' Length²	137	287	541	1,111	1,665	3,207
60' Length²	110	231	435	892	1,337	2,575
80' Length²	101	212	400	821	1,230	2,370
100' Length²	101	212	400	821	1,230	2,370

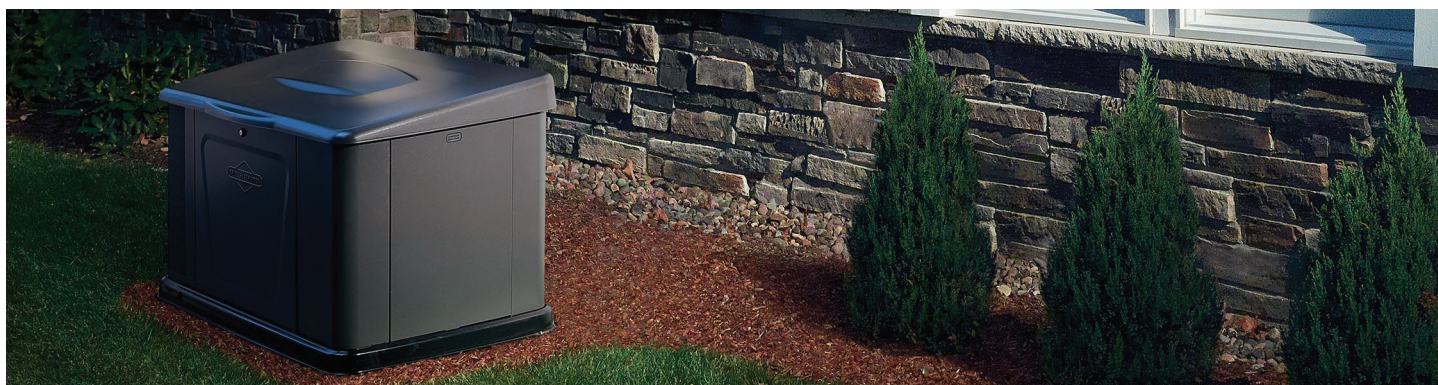

Support every step of the way

Need help? Visit gridironpower.ca

Complete the web form and a local dealer will contact you to answer questions on our generators, transfer switches and accessories.

¹ This generator is certified in accordance with UL (Underwriters Laboratories) 2200 (stationary engine generator assemblies) and CSA (Canadian Standards Association) standard C22.2 No. 100-14 (motors and generators).

² Total length of piping from outlet of regulator to appliance farthest away.

Briggs & Stratton has a policy of continuous product improvement and reserves the right to modify its specifications at any time and without prior notice.

Not for Prime Power or use where standby systems are legally required, for serious life safety or health hazards, or where lack of power hampers rescue of fire-fighting operations.

BS1151 - 8/18